




WORTHINGTON
ENTERPRISES



PTEC INLINE FILTER

Keep your hydrogen pure – with our PTEC Inline Filter. The PTEC Inline Filter uses an engineered metal fleece barrier to block impurities while maintaining a high H2 flow rate.

Hydrogen-fueled mobility is evolving fast. Whether you need to catch up, keep pace, or get ahead, we can help. We lead the market with compressed H2 containment solutions for storage, transport, and on-board fueling systems. From hydrogen refueling stations to storage and transport containers, from cars to buses and trucks, our type 1-4 cylinders, cylinder systems, and gas-street components help your sustainable mobility program move full speed ahead.

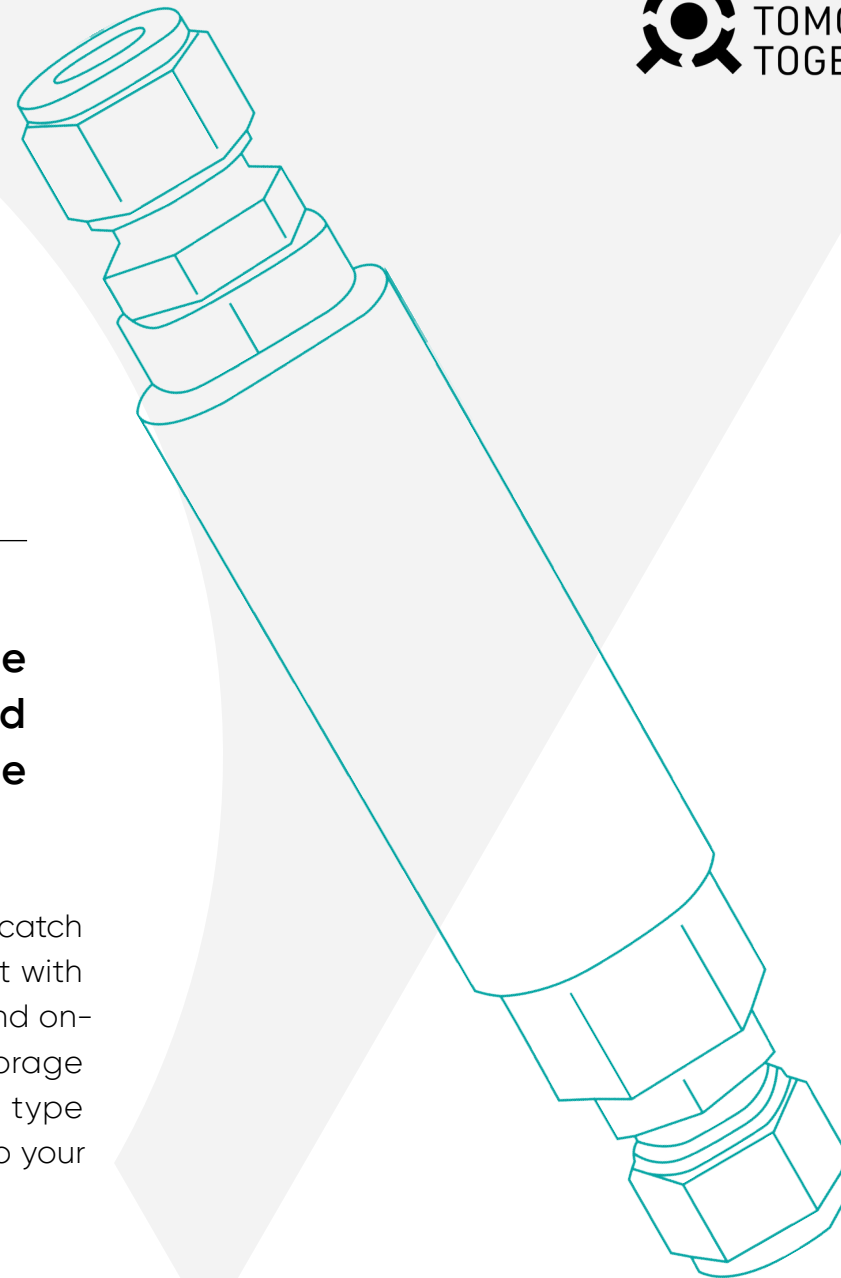

Engineered in Germany

Maintain the highest purity levels in your hydrogen-fueled operations with **PTEC Inline Filters**. Like all our components, we design our **PTEC Inline Filters** to attain the highest levels of safety, cleanliness, and user experience.



Durable



Lightweight



Design



Innovation



Long Range

Filtration: 10 μm

Tightness: $< 5 \times 10^{-5}$ mbar l/s, 20 °C, 100% He

Aperture diameter: up to 7.5 mm



All seals designed for **compressed H2**

Reliable in **fueling** and **operation**

Noiseless

Inlet / outlet: SAE 9/16-18 UNF,
other connections on request

Compact, low-weight design

Operating pressure: 0 - 70 MPa

Operating temperature: -40 °C - +85 °C

EC 79 Certifications

Burst pressure: > 105 MPa

Corrosion-resistant, stainless steel



All information is without guarantee. Images are for illustrative purposes only and may differ from the actual product due to continuous product development.



PTEC Pressure Technology GmbH | A Worthington Enterprises Company

Linde 11, 51399 Burscheid, Germany
DE-PTEC@wthg.com

+49 (0) 2174 70291
worthingtonenterprises.eu